


# DATA SHEET

## Switchover Box for the Fronius Energy Package

enwitec order number	<b>10011465_V1.3</b>	<b>All-pole; -standard-</b>
Type designation	<b>Switchover Box / Automatic transfer switch box</b>	
Matchcode	<i>3PH_FRO_BBDAP_20KW_3PH_1.3</i>	
Application	Fronius Energy Package - Energy storage system	
Battery-inverter	<ul style="list-style-type: none"> <li>• Symo GEN24 6.0 Plus/8.0 Plus/10.0 Plus</li> <li>• Symo Hybrid 3.0-3-S/4.0-3-S/5.0-3-S</li> </ul>	
Monitoring & Control	<ul style="list-style-type: none"> <li>• Fronius Smart Meter 63A - is integrated</li> </ul>	
Grid structure	<ul style="list-style-type: none"> <li>• 3PH 230/400V - TT or TN-S System; <b>NOT ANY</b> TN-C System</li> </ul>	

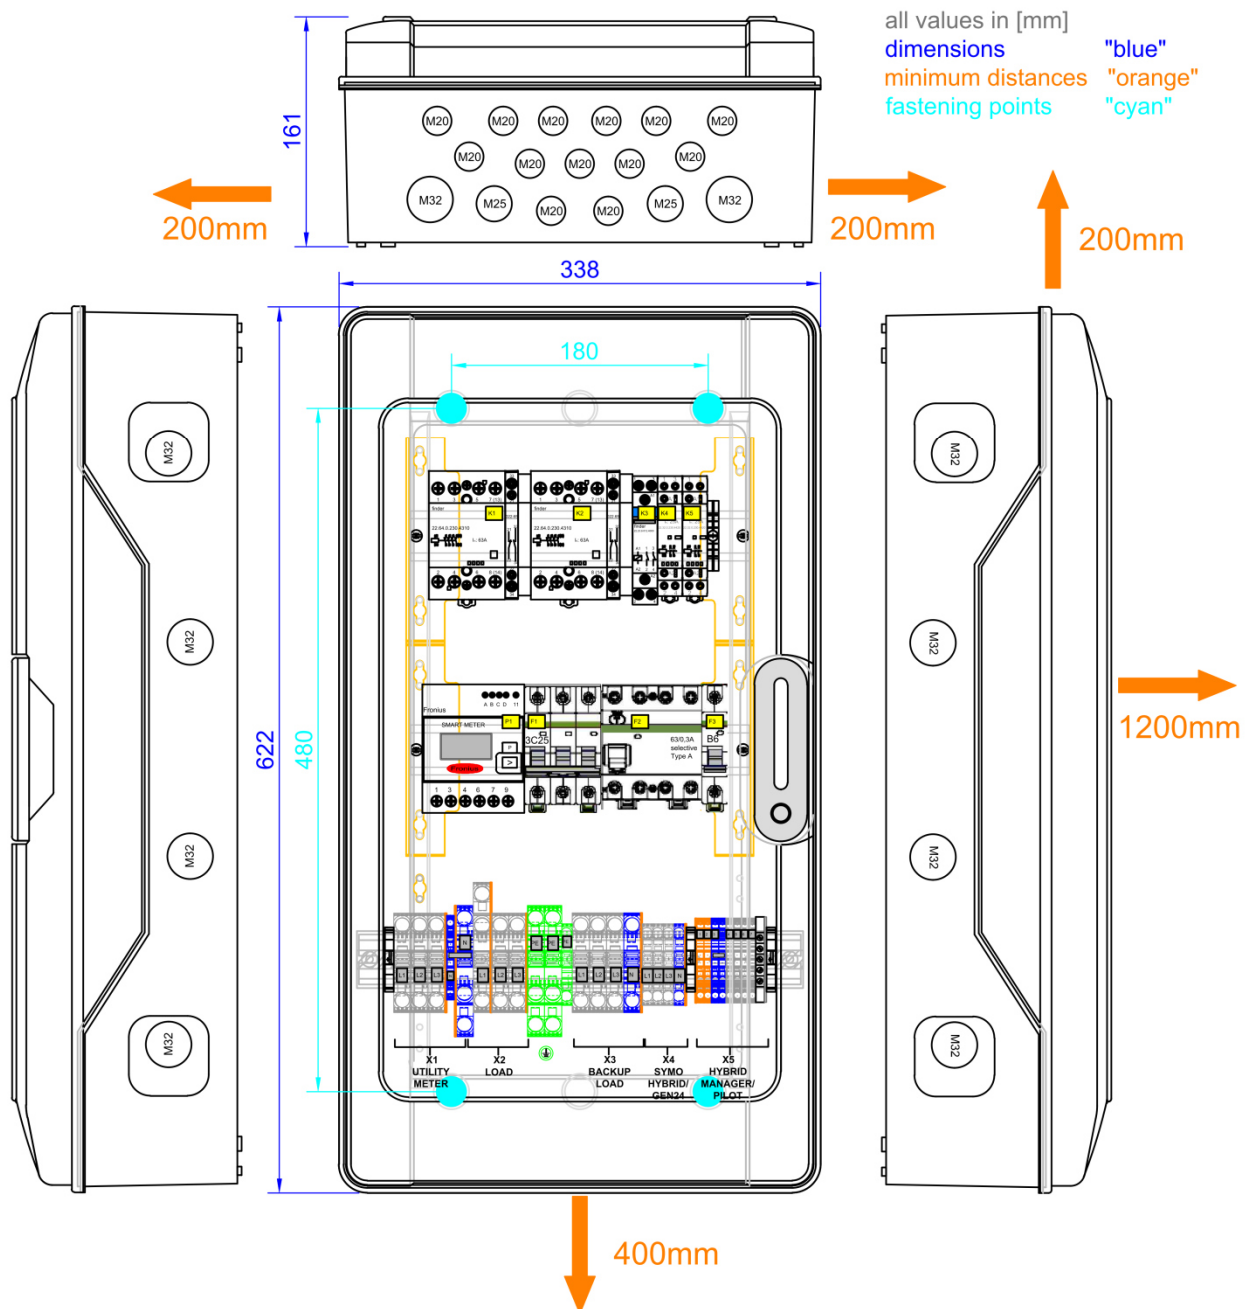


# DATA SHEET

Switchover Box for the Fronius Energy Package

## Circuitry overview - Symo GEN24 Plus



Please observe the manual "Switchover boxes for Fronius Energy Package"

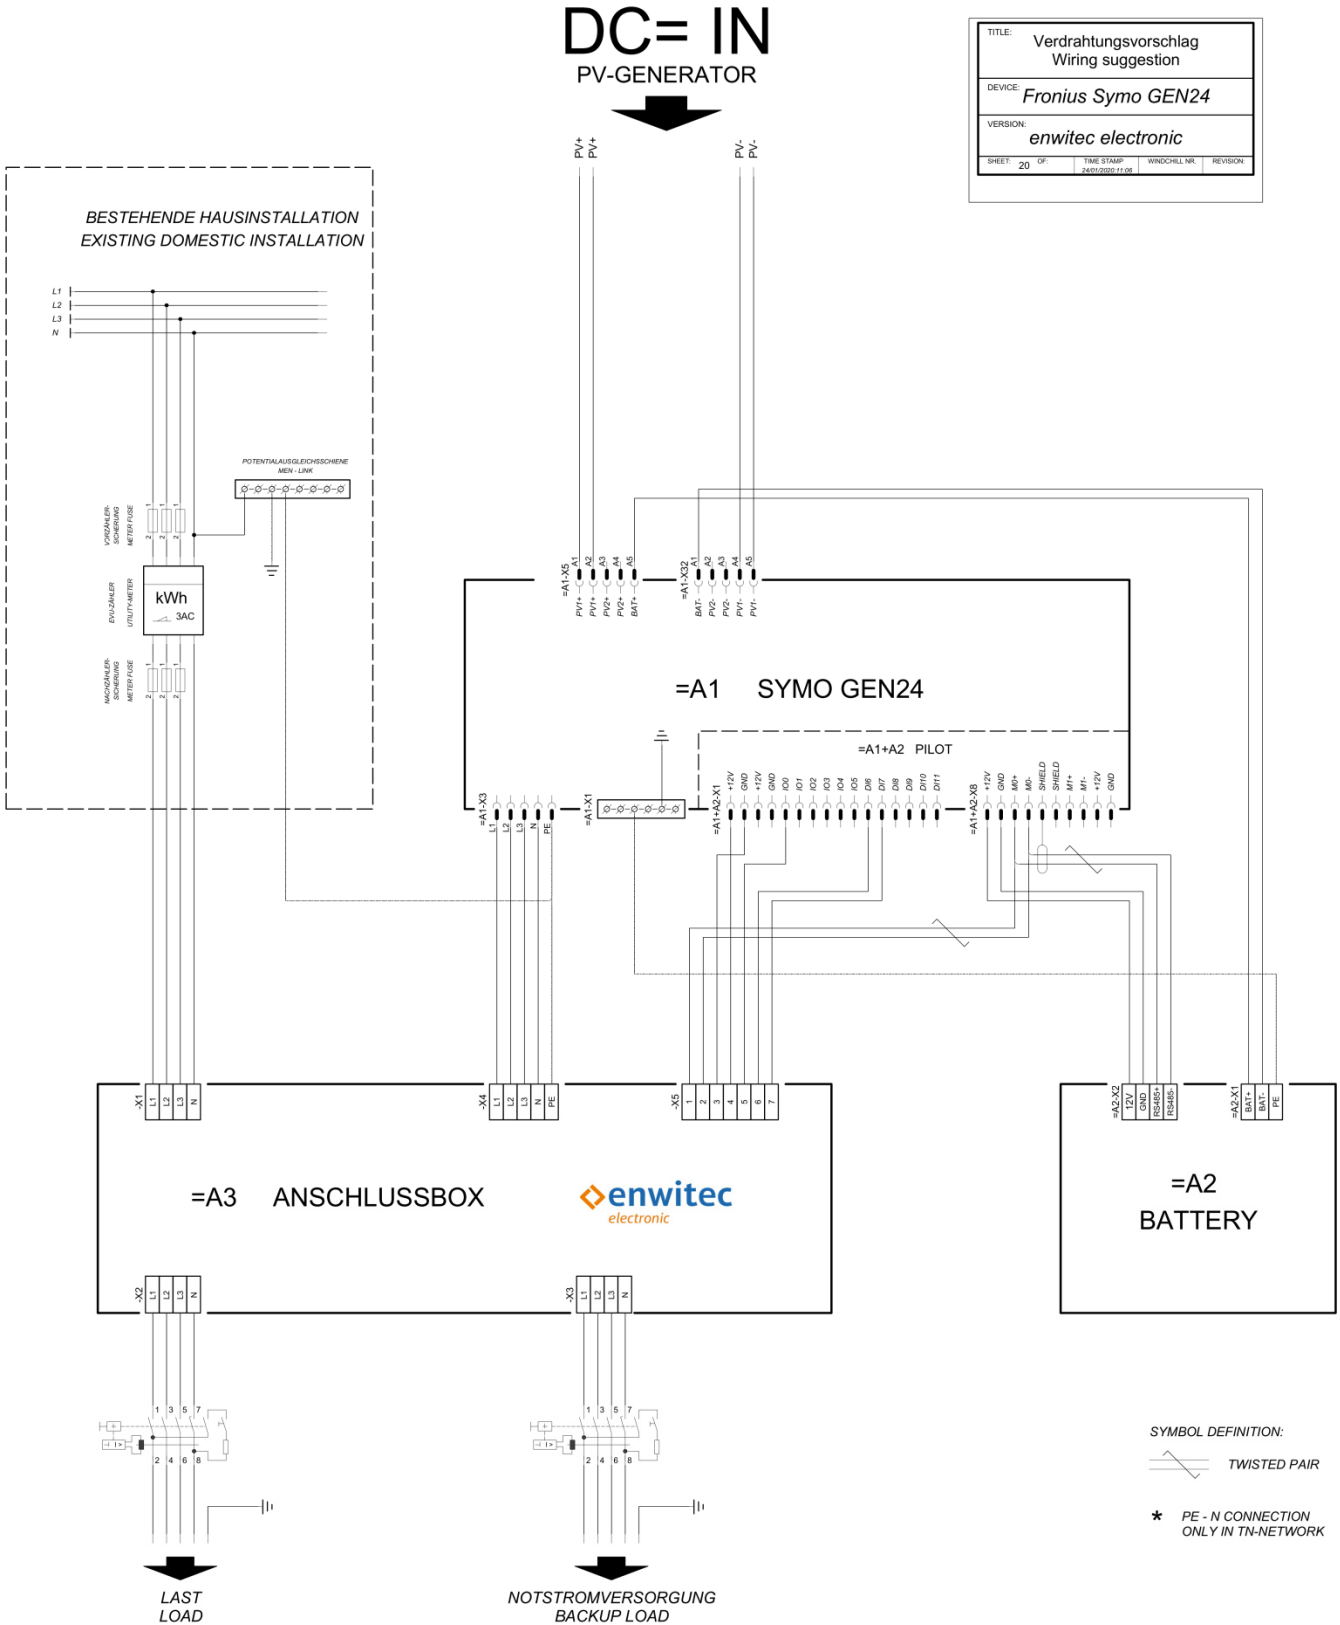

TITLE: Verdrahtungsvorschlag Wiring suggestion			
DEVICE: Fronius Symo GEN24			
VERSION: enwitec electronic			
SHEET: 20	OF:	TIME STAMP: 24.07.2020 11:08	REVISION:


# DATA SHEET

## Switchover Box for the Fronius Energy Package

### Circuitry overview - Symo Hybrid




Please observe the manual "Switchover boxes for Fronius Energy Package"

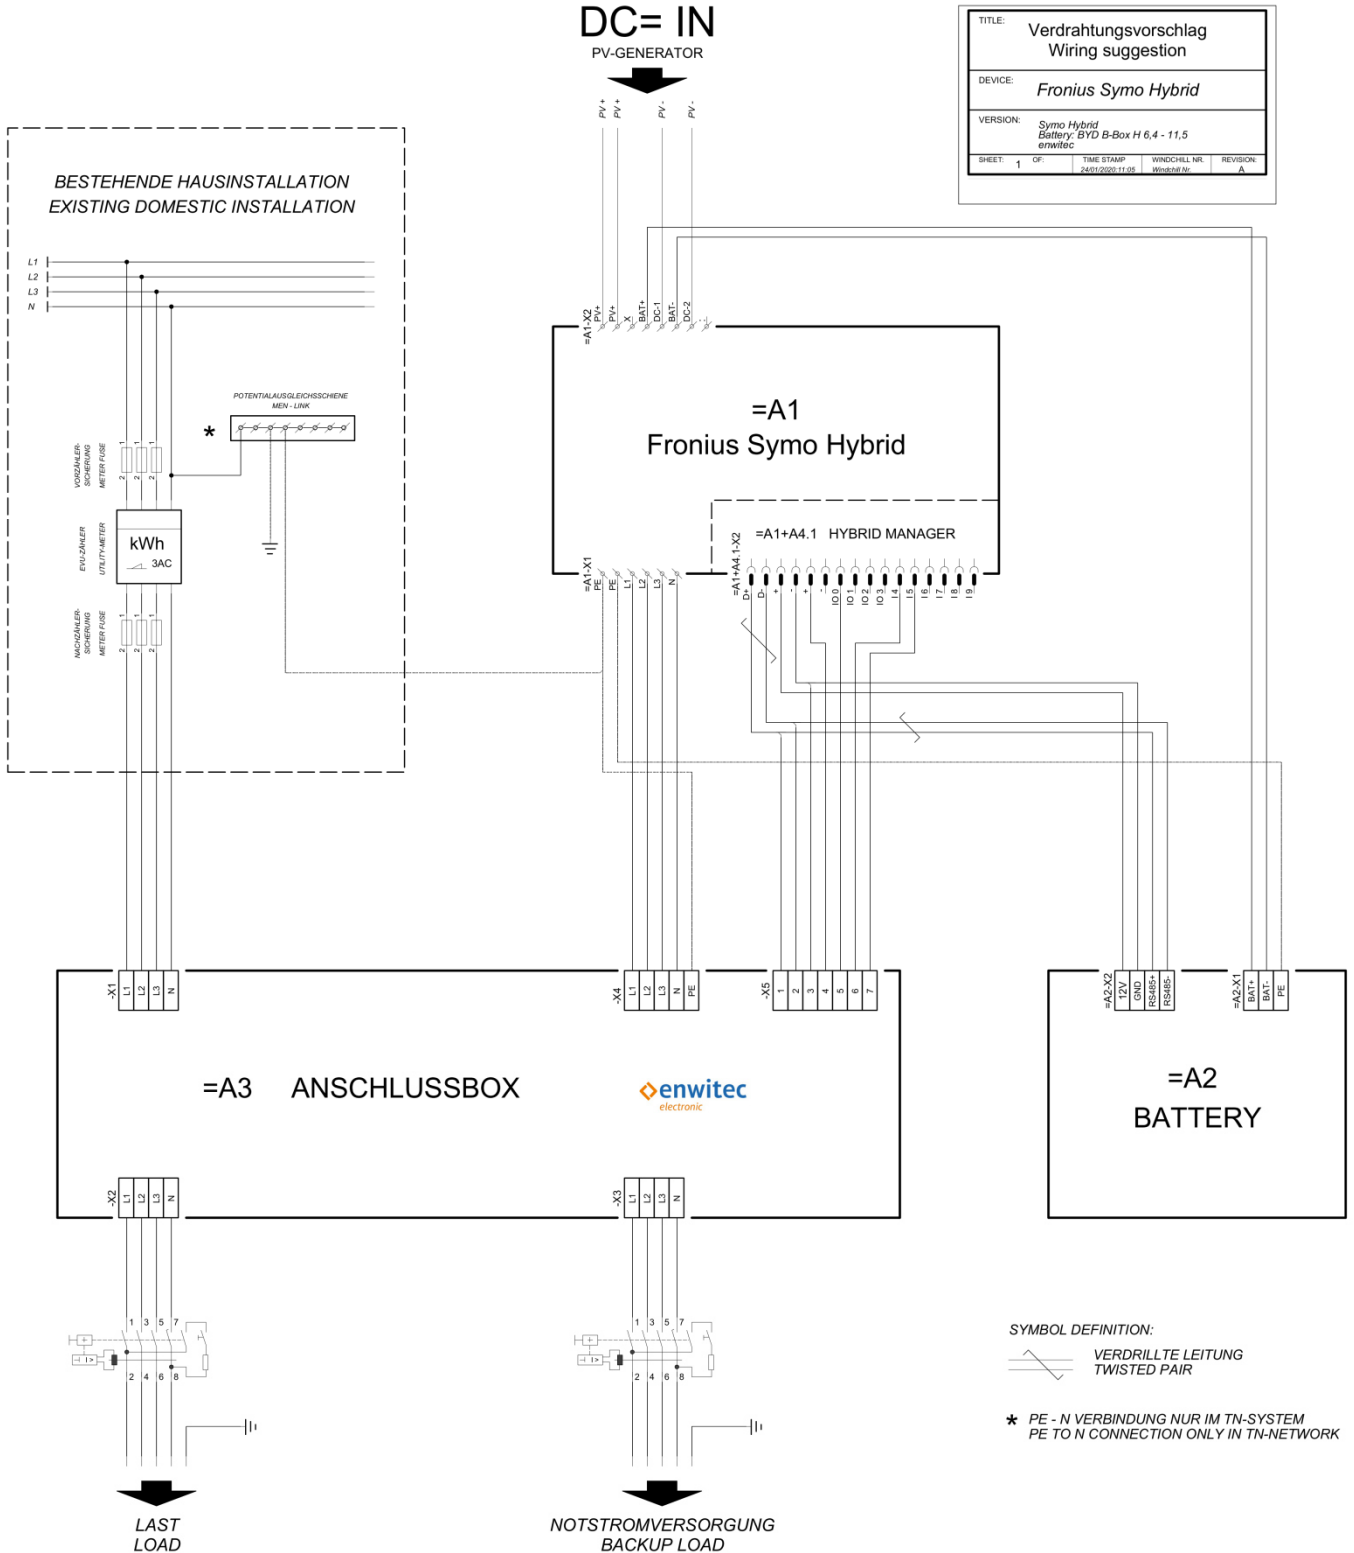

# DATA SHEET

## Switchover Box for the Fronius Energy Package

### Internal wiring - Switchover Box 10011465\_1.3

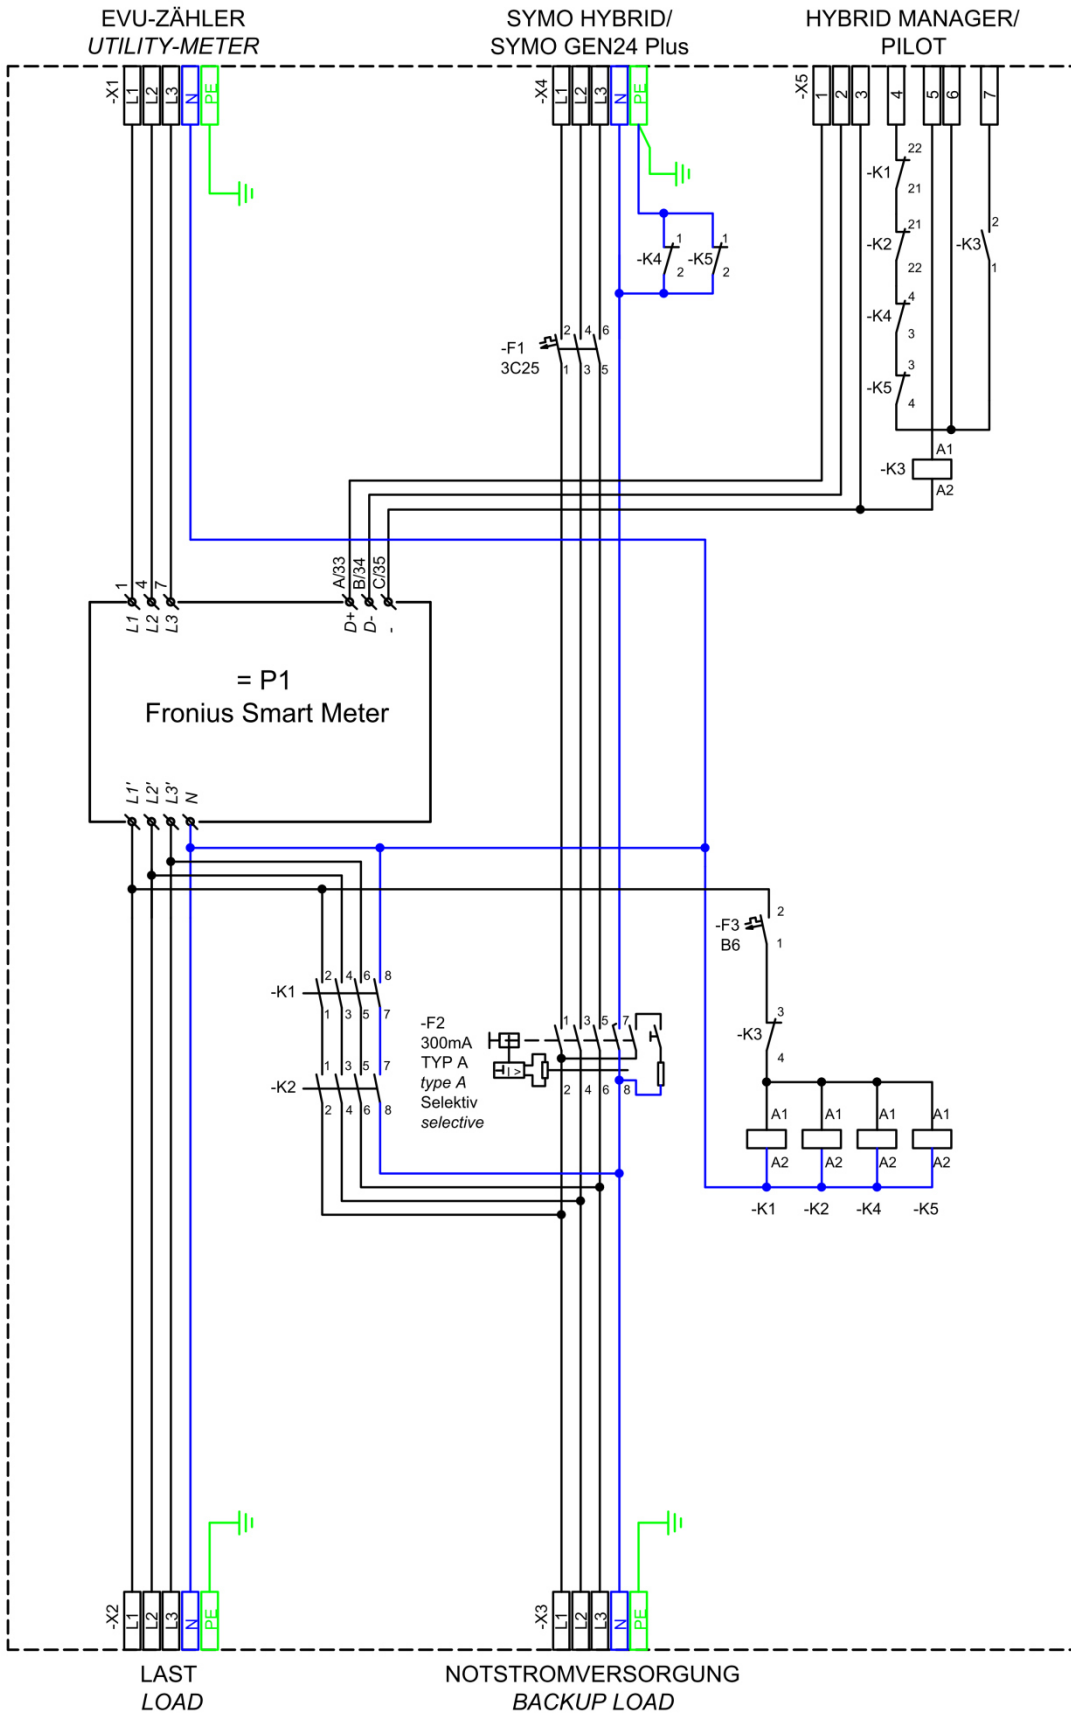

### TECHNICAL DATA

• = met    "-" = not met

#### NOMINAL VALUES

Rated voltage	3PH [V]	230/400
Rated insulation voltage	[V]	400
Rated frequency	[Hz]	50/60
Max. prospective* short circuit current	[kA]	10
Permitted grid structure		<b>TT/TN-S</b>
Max. value of pre-fuses	[A]	63(gL/gG)
Grid disconnection		All pole
Max. thermal power	[kW]	20
Standby-loss ca.	[W]	14

#### CIRCUIT BREAKERS (MCBs)

F1	Symo Hybrid/Symo GEN24 Plus	1 x 3C25
F3	Control circuit "Grid"	1 x B6A


#### RESIDUAL CURRENT DEVICE (RCCB) - type "A" selective

F2	Symo Hybrid/Symo GEN24 Plus	300mA
----	-----------------------------	-------


#### CONTACTORS IEC/EN61095; IEC/EN 60947-1; IEC 60947-5-1

K1/K2	"Grid disconnection"	AC1[A]	63
K4/K5	"Grounding device"	AC1[A]	25
K3	"Communication"	AC1[A]	20
K1/K2/K4/K5	"Control voltage"	AC[V]	230
K3	"Control voltage"	DC[V]	12
Hum-free			•

#### CONNECTIONS/TERMINALS - Max. cross section (Cu)

X1	"AC-Grid"	[mm <sup>2</sup> ]	16(25)
X2	"Loads - Not backuped"	[mm <sup>2</sup> ]	16(25)
X3	"Backup Load"	[mm <sup>2</sup> ]	16(25)
X4	Symo Hybrid/Symo GEN24 Plus	[mm <sup>2</sup> ]	6(10)
	"Equipotential bonding"	[mm <sup>2</sup> ]	16(25)
X5	Hybrid Manager/Pilot	[mm <sup>2</sup> ]	1,5(2,5)

#### CABLE GLANDS - Clamping range [ Ø mm]

X1	"AC-Grid"	M32/M40	13-21/16-28
X2	"Loads - Not backuped"	M32/M40	13-21/16-28
X3	"Backup Load"	M32	15-25
X4	Symo Hybrid/Symo GEN24 Plus	M32	13-21
	"Equipotential bonding"	M20	7-13
X5	"Communication cable"	M20	7-13

#### GENERAL DATA

Width	[mm]	338
Height	[mm]	622
Depth	[mm]	161
Weight ca.	[kg]	11
Operating temperature range	[°C]	-5...+40
Temperatur - transport/storage	[°C]	-25...+55
Temporary max. 24 hours	[°C]	+70°C
Humidity - condensing allowed	•/-	-
Humidity - permitted range	[%]	5...95
Max. altitude above sea level	[m]	2000
Protection class IP	(EN 60529)	65
Outdoor-application permitted	•/-	-
Installation type		Indoor area
Protection against electric shock	(EN61140)	II
Cabinet - material		PC
RoHS-conformity	(2011/65/EU)	•
Cabinet's colour	(similar to RAL)	7035
Way of mounting		Wall
Cover		transparent
Locking system		tool-free

#### STANDARDS

Switching devices	EN 61439-1	•
	EN 61439-2	•
Distribution boards - operated by ordinary people (DBO)	EN 61439-3	•

#### SMART METER

Manufacturer		Fronius
Type		63A-3

#### MISCELLANEOUS

Customer tariff number		85371098
------------------------	--	----------

\* characterizes the max. uninfluenced short circuit current of the network-connecting point (mains supply)