



Data sheet

blueplanet

5.0 TL3 | 6.5 TL3

7.5 TL3 | 9.0 TL3

Your quickest way to the highest yields.

The transformerless, three-phase inverters blueplanet 5.0 TL3 to 9.0 TL3.

All of the advantages of the larger 3-phase inverters can now be found in one power class which is just perfect for private roof systems as well as small commercial applications.

The blueplanet 5.0 TL3 to the 9.0 TL3 come, without exception, with 2 MPP trackers which can get to grips with all imaginable design configurations of a modular PV generator. As such, each MPP tracker can process the whole AC output. If you also consider the extremely wide input voltage range from 200 V to 950 V, multiple string configurations become possible. So, with these characteristics, the blueplanet TL3 present themselves as the most flexible three-phase inverters in their power class on the market.

The DC and AC periphery of the blueplanet TL3 ensures the quickest cabling

thanks to plug-in connectors and the menu selection is performed conveniently using the graphic display. So that the appliances can stand up to the harshest conditions out in the open, their compact housing is built to IP65 protection class. Nevertheless, weighing just 30 kg they can still be carried easily.

The standard incorporation of RS485, Ethernet and USB ensures elegant communication and convenient monitoring – even more interfaces are optionally available. The data logger and the web server are already integrated as standard! As a result, these inverters offer complete monitoring and strong communication in any environment. An additional interface module with 4 digital inputs allows performance targets sent by the grid operator via ripple control receiver to be put into action by the inverters themselves;

this does away with an intermediate data logger.

If you want to use your self-generated solar power in your own home, the blueplanet 5.0 TL3 to 9.0 TL3 also come with our Priwatt function for managing self-use.

Your declaration of solar independence becomes complete when you use an intelligent energy storage system; it allows you to use your own clean energy whenever you want to. Fitted with these blueplanet TL3, your private solar power plant can be upgraded with a storage system at any time. And, our blueplanet gridsave eco 5.0 TR1 battery inverter will take care of the energy management of your PV storage system too.

Technical data

blueplanet 5.0 TL3 | 6.5 TL3 | 7.5 TL3 | 9.0 TL3

Electrical data	5.0 TL3	6.5 TL3
DC input		
MPP range@Pnom	240 V ... 800 V	310 V ... 800 V
Operating range	200 V - 950 V	200 V - 950 V
Min. DC voltage/starting voltage	200 V / 250 V	200 V / 250 V
No-load voltage	1000 V	1000 V
Max. input current	2 x 11.0 A	2 x 11.0 A
Number of MPP trackers	2	2
Max. power/tracker	5.2 kW	6.7 kW
Number of strings	2	2
AC output		
Rated output	5000 VA	6500 VA
Supply voltage	acc. to local requirements	acc. to local requirements
Rated current	3 x 7.25 A	3 x 9.5 A
Rated frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
cos phi	0.30 inductive ... 0.30 capacitive	0.30 inductive ... 0.30 capacitive
Number of grid phases	3	3
General electrical data		
Max. efficiency	98.3 %	98.3 %
Europ. efficiency	97.4 %	97.6 %
Night consumption	1.5 W	1.5 W
Circuitry topology	transformerless	transformerless
Mechanical data		
Display	graphical display + LEDs	graphical display + LEDs
Control units	4-way navigation + 2 buttons	4-way navigation + 2 buttons
Interfaces	standard: 2 x Ethernet, USB, RS485 optional: S0, 4-DI, 4-DO	standard: 2 x Ethernet, USB, RS485 optional: S0, 4-DI, 4-DO
Fault signalling relay	potential-free NOC max. 230 V / 1 A	potential-free NOC max. 230 V / 1 A
Connections	DC: SUNCLIX AC: plug	DC: SUNCLIX AC: plug
Ambient temperature	-25 °C ... +60 °C ¹⁾	-25 °C ... +60 °C ¹⁾
Cooling	temperature-dependent fan	temperature-dependent fan
Protection class	IP65	IP65
Noise emission	< 45 dB(A)	< 45 dB(A)
DC switch	integrated	integrated
Casing	aluminium casting/innovative ASA/PC	aluminium casting/innovative ASA/PC
H x W x D	522 x 363 x 246 mm	522 x 363 x 246 mm
Weight	30 kg	30 kg
Certifications		
Safety	EN 61000-6-1/-2/-3, IEC 62109-1/ -2	
Grid compliance	VDE-AR-N 4105, VDE0126-1-1, ÖVE/ÖNORM E 8001, UTE C 15-712-1, G83-2, G59/3, CEI-021, EN 50438, C10/11, ... for more see homepage/download area	

Conforms to the country-specific standards and regulations according to the country version that has been set.
¹⁾ Power derating at high ambient temperatures.


Electrical data	7.5 TL3	9.0 TL3
DC inputs		
MPP range@Pnom	350 V ... 800 V	420 V ... 800 V
Operating range	200 V - 950 V	200 V - 950 V
Min. DC voltage/starting voltage	200 V / 250 V	200 V / 250 V
No-load voltage	1000 V	1000 V
Max. input current	2 x 11.0 A	2 x 11.0 A
Number of MPP trackers	2	2
Max. power/tracker	7.7 kW	8.8 kW
Number of strings	2	2
AC outputs		
Rated output	7500 VA	9000 VA
Supply voltage	acc. to local requirements	acc. to local requirements
Rated current	3 x 10.9 A	3 x 13.0 A
Rated frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
cos phi	0.30 inductive ... 0.30 capacitive	0.30 inductive ... 0.30 capacitive
Number of grid phases	3	3
General electrical data		
Max. efficiency	98.3 %	98.3 %
Europ. efficiency	97.7 %	97.9 %
Night consumption	1.5 W	1.5 W
Circuitry topology	transformerless	transformerless
Mechanical data		
Display	graphical display + LEDs	graphical display + LEDs
Control units	4-way navigation + 2 buttons	4-way navigation + 2 buttons
Interfaces	standard: 2 x Ethernet, USB, RS485 optional: S0, 4-DI, 4-DO	standard: 2 x Ethernet, USB, RS485 optional: S0, 4-DI, 4-DO
Fault signalling relay	potential-free NOC max. 230 V / 1 A	potential-free NOC max. 230 V / 1 A
Connections	DC: SUNCLIX AC: plug	DC: SUNCLIX AC: plug
Ambient temperature	-25 °C ... +60 °C ¹⁾	-25 °C ... +60 °C ¹⁾
Cooling	temperature-dependent fan	temperature-dependent fan
Protection class	IP65	IP65
Noise emission	< 45 dB(A)	< 45 dB(A)
DC switch	integrated	integrated
Casing	aluminium casting/innovative ASA/PC	aluminium casting/innovative ASA/PC
H x W x D	522 x 363 x 246 mm	522 x 363 x 246 mm
Weight	30 kg	30 kg
Certifications		
Safety	EN 61000-6-1/-2/-3, IEC 62109-1/ -2	
Country-specific approval	VDE-AR-N 4105, VDE0126-1-1, ÖVE/ÖNORM E 8001, UTE C 15-712-1, G83-2, G59/3, CEI-021, EN 50438, C10/11, ... for more see homepage/download area	

Conforms to the country-specific standards and regulations according to the country version that has been set.
¹⁾ Power derating at high ambient temperatures.



Graphical Display of efficiency

3D efficiency diagram for blueplanet 9.0 TL3

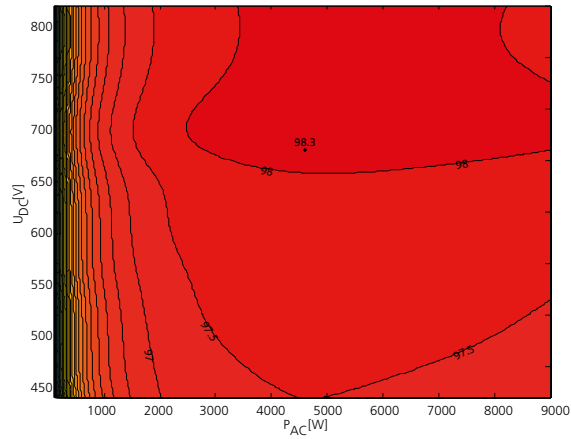

blueplanet
5.0 TL3 | 6.5 TL3
7.5 TL3 | 9.0 TL3

Up to 97.9% efficiency

Two MPP trackers, symmetrical
and asymmetrical loading possible

Multilingual menu


Graphical display

Data logger with web server

USB connection for updates

Priwatt function for the self-use
of solar power

Efficiency characteristic curve for blueplanet 9.0 TL3

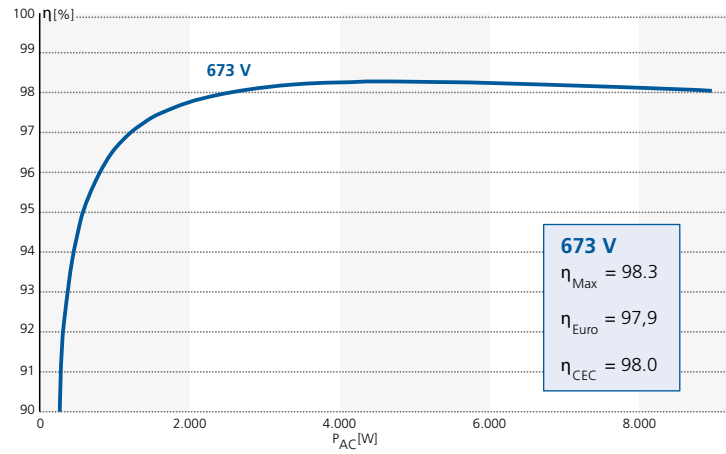

Your retailer